


12-APH-SS-T-C – Fabricated Air Pipe Head 12?

SKU: 12-APH-SS-T-C

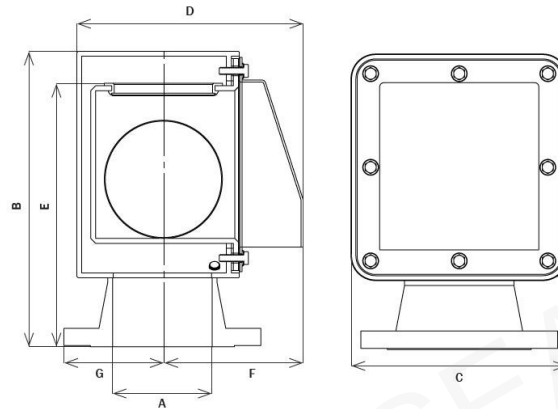

Description

- Prevents seawater from entering tanks Allows air/vapor to escape when tank is filling Allows air intake when tank is discharging Vertical orientation is ideal for reducing weight and eliminates the need for a gooseneck pipe bend

Specification Table

_approximate_weight_lb	392
closing_device_option	Closing Device
connection	Threaded
construction	Internal housing is removable for easy maintenance
dimension_c_in	23.5"
dimension_d_in	24.38"
dimension_e_in	25.63"
dimension_f_in	15.31"
dimension_g_in	9.5"
flame_insect_screen	Corrosion Resistant For Ignition Protection Easily Accessible For Maintenance
float_option	Stainless Steel (Standard)
flow_rate_at_3_625_psi_gpm	2700"
hardware	Stainless Steel

material	Stainless Steel 316
max_inlet_air_speed_mpers	26"
minimum_order	1
nitrile_seal	Maximize Low Pressure Sealing Oil And Fuel Resistant
package_type	Each
units_per_package	1
notes	Air Intake Tested With Polyethylene Float (Lightest Float) And The Water Pumped Through The Vent Check Valves For The Flow Rate.

HYDRASEARCH